


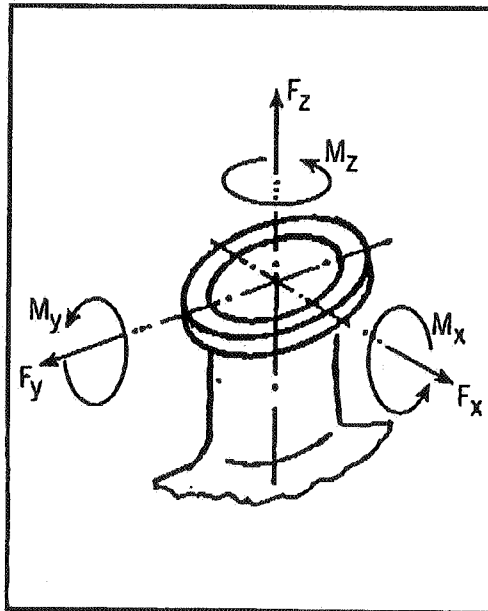

Kräfte / Drehmomente

Tabelle 1 Zulässige Stutzen-Belastung (Richtwerte)

Stutzen-Nennweite (mm)	Kräfte		Drehmomente	
	$F_x = F_y$ [N]	F_z [N]	$M_x = M_y$ [Nm]	M_z [Nm]
25	200	900	30	20
32	250	1100	50	30
40	300	1400	75	45
50	400	1800	120	75
65	500	2300	200	120
80	600	2800	300	180
100	750	3500	400	250
125	950	4400	700	450
150	1100	5300	900	550
200	1500	7000	1500 ✓	900 ✓
250	1900	9000	2100	1300
300	2300	11000	3100	1900
400	3000	14000	6200	3700

ALLOWABLE NOZZLE LOADS FOR GLASSED STEEL REACTORS

Pfautler

A Unit Of Robbins & Myers U.K. Limited

Pfautler-Balfour

Leven, Fife KY8 4RW, Scotland

Telephone: (01333) 423020

Facsimile: (01333) 427432