


Derivation of the Breaking an Elbow with an Arbitrary Angle at an Arbitrary Angle

Michael Fletcher

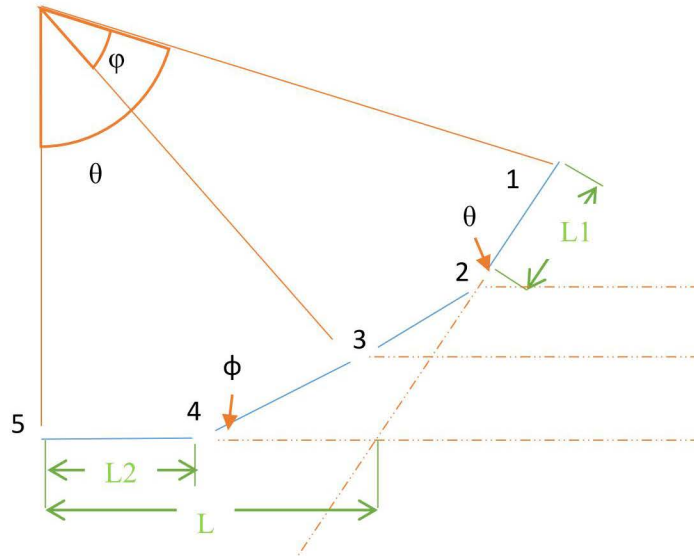

A bend of radius R and of bend angle θ is to be split at angle ϕ for analysis.

Length from center of bend to end of bend. (Note: L to be substituted in 45° bends to match ASME B16.9 as needed.)

$$L = R \cdot \tan\left(\frac{\theta}{2}\right)$$

Sum of the horizontal components:

$$L_{12} \cos(\theta) + L_{23} \cos(\phi) + L_{34} \cos(\phi) + L_{45} \cos(\phi) = L + L \cos(\theta)$$

Sum of vertical components:

$$L_{12}\sin(\theta) + L_{23}\sin(\varphi) + L_{34}\sin(\varphi) = L\sin(\theta)$$

With the caveat:

$$L_{12} = L_{23} = L_1, L_{34} = L_{45} = L_2$$

Simplifying:

$$L_1(\cos(\theta) + \cos(\varphi)) + L_2(\cos(\theta) + \cos(\varphi)) = L(1 + \cos(\theta))$$

$$L_1(\sin(\theta) + \sin(\varphi)) + L_2\sin(\varphi) = L\sin(\theta)$$

$$L_1 = \frac{L(1 + \cos(\theta)) - L_2(\cos(\theta) + \cos(\varphi))}{\cos(\theta) + \cos(\varphi)}$$

Substituting:

$$\left(\frac{L(1 + \cos(\theta)) - L_2(\cos(\theta) + \cos(\varphi))}{\cos(\theta) + \cos(\varphi)}\right)(\sin(\theta) + \sin(\varphi)) + L_2\sin(\varphi) = L\sin(\theta)$$

$$\left(L(1 + \cos(\theta)) - L_2(\cos(\theta) + \cos(\varphi))\right)\frac{\sin(\theta) + \sin(\varphi)}{\cos(\theta) + \cos(\varphi)} + L_2\sin(\varphi) = L\sin(\theta)$$

$$L(1 + \cos(\theta))\frac{\sin(\theta) + \sin(\varphi)}{\cos(\theta) + \cos(\varphi)} - L_2(\cos(\theta) + \cos(\varphi))\frac{\sin(\theta) + \sin(\varphi)}{\cos(\theta) + \cos(\varphi)} + L_2\sin(\varphi) = L\sin(\theta)$$

$$L_2\sin(\varphi) - L_2(\cos(\theta) + \cos(\varphi))\frac{\sin(\theta) + \sin(\varphi)}{\cos(\theta) + \cos(\varphi)} = L\sin(\theta) - L(1 + \cos(\theta))\frac{\sin(\theta) + \sin(\varphi)}{\cos(\theta) + \cos(\varphi)}$$

$$L_2\left(\sin(\varphi) - (\cos(\theta) + \cos(\varphi))\frac{\sin(\theta) + \sin(\varphi)}{\cos(\theta) + \cos(\varphi)}\right) = L\sin(\theta) - L(1 + \cos(\theta))\frac{\sin(\theta) + \sin(\varphi)}{\cos(\theta) + \cos(\varphi)}$$

$$L_2(-\sin(\theta)) = L\sin(\theta) - L(1 + \cos(\theta))\frac{\sin(\theta) + \sin(\varphi)}{\cos(\theta) + \cos(\varphi)}$$

$$L_2 = L\left(\frac{(1 + \cos(\theta))\sin(\theta) + \sin(\varphi)}{\sin(\theta)\cos(\theta) + \cos(\varphi)} - 1\right)$$

Notes:

- Bends shall be specified at points 2 and 4 only. The radius of both bends is R.
- L12 and L45 must be at least this long. They may be longer, but any excess of this value will be straight piping.
- An error message may appear as you apply a bend at these locations if you specify minimum lengths, and CAESAR automatically attempts to place a node at this location when you apply the bend modifier.
- The mathematics above assumes that L45 is oriented along a primary axis. It may be necessary to temporarily re-orient the entire model or sections of the model in order to work the math out.
- Only one break is considered, but the logic can be extended to multiple breaks. For example, instead of a 30° bend broken at 10° and 20°, you can think of it as two 15° bends broken at 10° and 5°. The second 15° bend must, however, be rotated 15° relative to the first 15° bend to act as a continuous 30° bend.